



NOISE & VIBRATION
EXPERTS

NOISE MANAGEMENT OF MINING EQUIPMENT

Soft dB has developed expertise in the real-time identification of equipment noise levels. A web interface shows noise levels generated by each machine. This enables mining operations managers to better target their mitigation efforts and ensure acceptable noise emission levels throughout the day.

The interface emphasizes on the louder machines so that the manager can easily decide which machine should be turned off and whether it can be turned back on. It is particularly useful for a mine located near a residential zone.



A TOOL YOU CAN COUNT ON

Real-time identification of the noise level of the equipment.
Interactive web interface displaying the noise impact of each machine.
Helps mining operations managers continuously comply with noise regulations.

Knowing the noise of the source machinery and their current position, Soft dB uses a propagation model with the topography and several wind conditions to determine the resulting noise of machinery in an open pit.






SOUND INTENSITY MAPPING SYSTEM

Soft dB has developed extensive expertise in the identification and characterisation of sound sources. The principal diagnostic tool used is the Soft dB I-Track system. The I-Track is a unique sound intensity mapping system that visually represents the sound emerging from a source.

Once an acoustic problem has been identified, Soft dB applies its years of experience in reducing the noise in commercial and industrial environments.

ADVANCED NOISE DIAGNOSIS

Fast and accurate diagnosis using Sound Intensity Maps
Custom and innovative noise reduction solutions

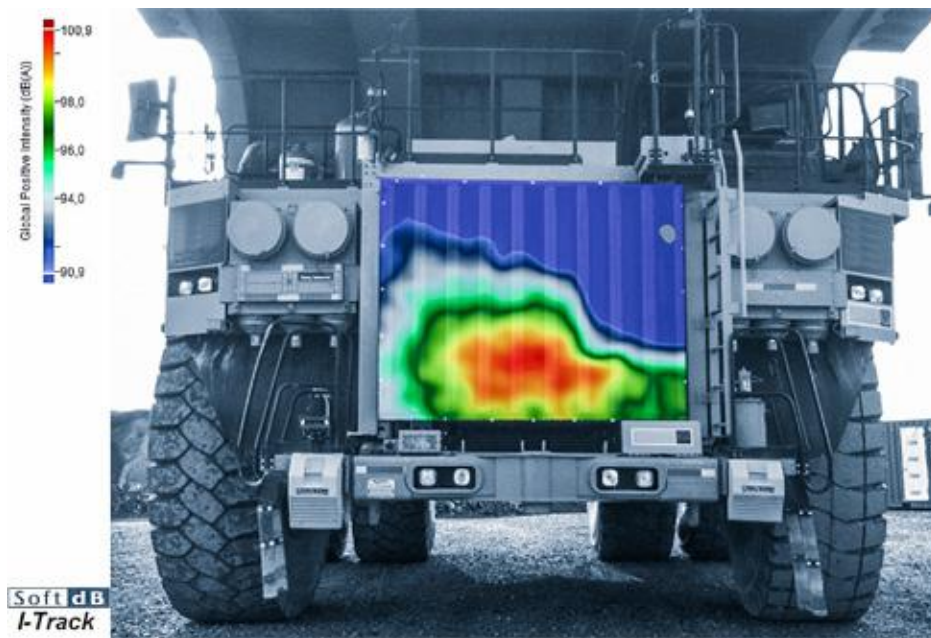

Measurements of sound power, pressure
and Intensity levels using advanced
sound mapping techniques to ISO and
ASTM standards



CUSTOMIZED REMOTE MONITORING

Rugged Web Monitoring Stations Tailored to Your Needs

Customize the main interface to follow the current levels and status of several stations
 Customize the level history interface to display and export data

CURRENT NOISE LEVELS												
Last noise levels (08:11:06 29-02-2016)												
Ping	Sync	Station		Time/Date	L05 dB	L10 dB	L35 dB	L50 dB	L90 dB	L95 dB	LAeq dB	%
100% / 6ms		Station1	+	08:00 29-02-2016	62,7	60,6	32,7	31,3	29,5	29,1	55,5	51%
100% / 13ms		Station2	+	08:00 29-02-2016	44,9	43,0	38,3	36,8	34,0	33,4	42,5	100%
100% / 26ms		Station3	+	08:00 29-02-2016	41,3	39,6	36,8	35,7	33,0	32,4	37,6	100%
100% / 5ms		Station4	-	08:00 29-02-2016	37,6	35,2	31,9	31,2	29,1	28,7	33,9	48%
				07:50 29-02-2016	40,0	38,6	36,3	35,6	33,3	32,5	36,5	100%
				07:40 29-02-2016	39,7	38,8	36,3	35,2	32,0	31,2	36,2	100%
				07:30 29-02-2016	42,8	41,4	38,5	37,2	34,2	33,7	38,9	100%
				07:20 29-02-2016	45,6	44,2	41,7	40,6	36,8	35,8	41,9	100%
				07:10 29-02-2016	47,0	45,2	41,7	40,6	37,6	36,3	46,9	100%

Station Status		
Station	Time/Date	Message
+	Station1	14:37 23-02-2016 Restarted(NotRealtime)
+	Station2	22:25 05-02-2016 Restarted(GeneralError)
+	Station3	09:56 24-02-2016 Restarted(Manual)
+	Station4	21:59 24-02-2016 UpToDate

Calibration Check						
Station	Calibration reference dB	Time/Date reference	Calibration verification dB	Time/Date verification	Deviation dB	Pass
Station1	89,9	09:41 14-09-2015	90,2	18:50 28-02-2016	0,3	YES
Station2	90,3	20:44 28-12-2015	90,4	18:50 28-02-2016	0,1	YES
Station3	85,2	11:26 03-02-2016	85,4	18:51 28-02-2016	0,2	YES
Station4	90,1	12:03 28-12-2015	90,2	18:50 28-02-2016	0,1	YES


MONITORING STATIONS

Live On The Web

The Soft dB Web Service provides an easy way to perform remote noise and vibration monitoring. It gathers the data from one or several monitoring stations and makes it available on a private web page 24/7. The Soft dB Web Service and monitoring stations allows for versatile configurations; from temporary to permanent, from a single monitoring station to several, from simple measurements to advanced functions.

Soft dB also offers solutions for customized web interfaces that meet the specific needs of each project.

- 24/7 Web page access
- Private web page with login and password
- Noise, Vibration and Weather monitoring
- Interactive Web page with Time-History, Spectrum, Audio Playback and Picture Viewing
- Up to 4 channels SLM or 1 channel SLM and 3 channels Vibration

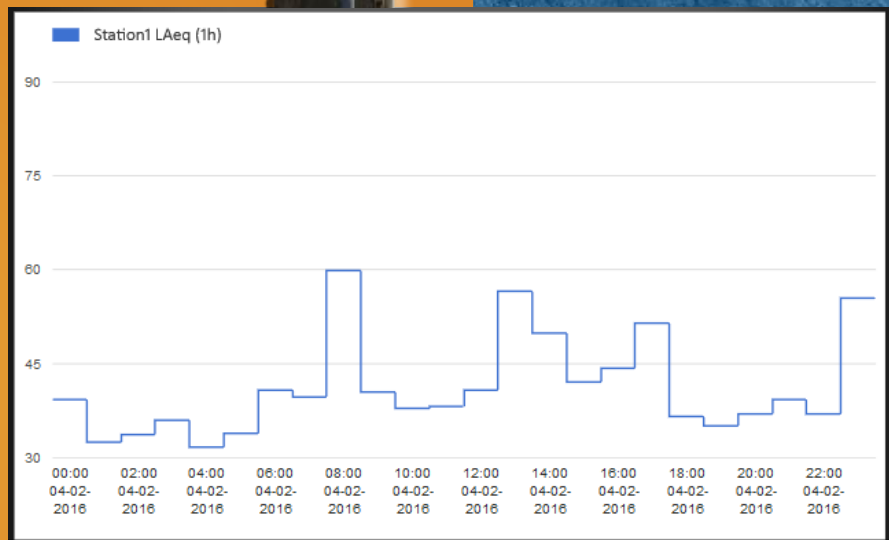

SOFTDB.COM

Head Office

1 (866) 686-0993
infoconsultation@softdb.com

Montreal

1 (877) 774-3800
a.gerard@softdb.com

Ontario

1 (877) 774-3800
c.yoong@softdb.com

United States

1 (781) 645-8487
f.perot@softdb.com



Soft dB