


SMS-CTP Centralized Control Panel

Part of the **smartSMS-NET** product line
 State-of-the-art Networked Sound Masking System


- 7" Touch Screen Wall mount panel
- Simple and easy masking sound and music volume adjustment in any zone
- Secured access via password



On screen volume control to display and access all projects and zones.

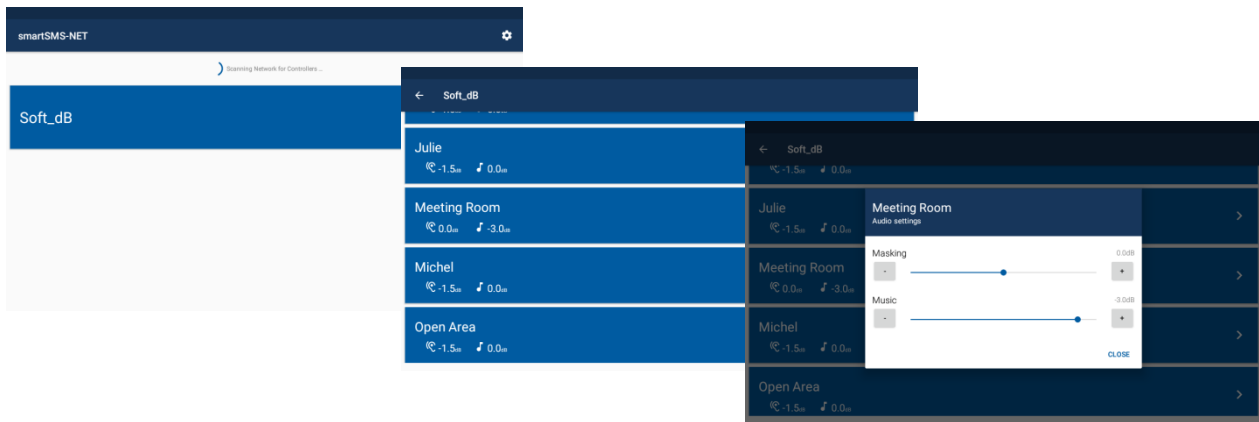

Connectivity: Ethernet with RG45 (as illustrated below) or WiFi

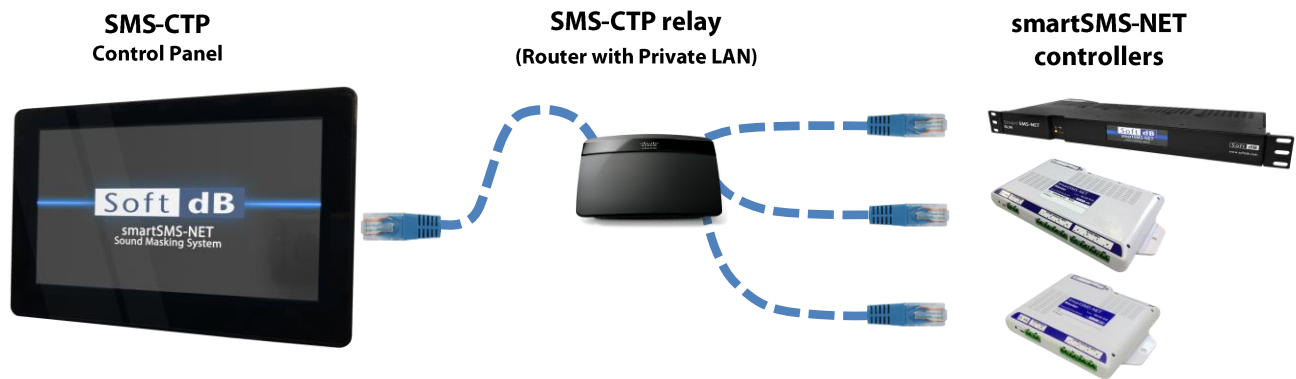

Specifications

Volumes	
Sound Masking	±10 dB with respect to calibrated sound masking level
Music	30 dB
Connectivity	
Connectivity	TCP/IP
Interfaces	Ethernet (RJ45) or WiFi (802.11b/g/n, WiFi radio module can be disabled if not required)
Protocol	Proprietary
Screen	
Size	7 inch (178mm)
Resolution	1024 x 600
Brightness	350 cd/m ²
Touch Panel Technology	Capacitive
Power	
Basic	DC-IN (9-36VDC), Power Supply provided
Available	PoE (IEEE 802.3.af, 48V)
	Max 15W
Physical	
Size	182mm x 121mm x 25mm (7.2" x 4.75" x 1")
Weight	0.9lb (400g)
Mounting	Wall-mount bracket
Options	
Locked Guard Box	Key-locked clear polycarbonate box, 248mm x 184mm x 86mm (9.75" x 7.25" x 3.33")
PoE Injector	19W IEEE 802.3af PoE injector supporting 10/100 Mbps

Very easy to install with mounting bracket or adhesive pad

